

VRLA Rechargeable Battery

MSU-3000 (2V, 3000Ah)



FEATURES

- Sealed structure, no electrolyte leakage or spill.
- High performance alloy to secure corrosion-proof feature.
- Unique electrolyte system achieves maximum service life.
- Low self-discharge rate, lower than 3% capacity loss per month.
- Special paste formula promotes the good charging acceptance.
- Electrolyte with gel technology.

APPLICATION

- Telecom
- UPS
- Central Office
- Energy Storage Systems



SPECIFICATIONS

Nominal Voltage	2 V
Nominal Capacity	3000Ah @ 10 hour rate F.V.(1.80V/cell)
Approx. Weight	190.0Kg(418.9lbs.)
Terminals	B6 (Fitting M8 bolt & nut)
Internal Resistance	≤ 0.3m Ω (Fully Charged)
Max. Discharge Current	9000 A (5 sec.)
Max. Charge Current	750 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Safety Valve	Opening pressure 10~35 kPa
Container Material	Standard: ABS(UL 94-HB) MSU-3000 Optional: Flame Retardant ABS(UL 94-V0) MSU-3000FR



- IEC60896-21/22
- JIS C 8704-2
- GB/T19638.2
- YD/T799

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

Length

710±2.0 (27.95±0.08)

Width


353±2.0 (13.90±0.08)

Container Height


341±2.0 (13.43±0.08)

Total Height

369±2.0 (14.53±0.08)

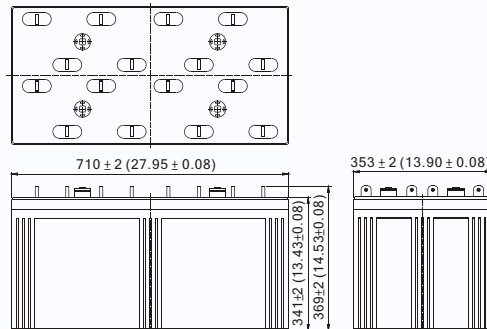

● Terminal B6



(M8 BOLT & NUT)

Terminal Hardware Initial Torque: 10.0 Nm ± 5%

Constant power discharge characteristics at 20°C/68°F Unit: W

F.V. (V/cell) \ Discharge Time	30 Min	1 Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	12 Hr	20 Hr
1.85V	3934.5	2700.0	1737.0	1352.9	1051.6	906.0	807.0	667.5	558.0	483.60	301.32
1.80V	4365.0	2970.0	1875.0	1433.2	1158.0	987.0	859.5	714.0	590.6	506.94	315.98
1.75V	4782.0	3150.0	1987.5	1508.9	1213.2	1032.0	897.0	736.5	616.8	524.32	325.39
1.70V	5250.0	3360.0	2055.0	1560.5	1237.5	1057.5	919.5	751.5	637.5	536.56	330.75
1.65V	5640.0	3465.0	2085.0	1592.3	1263.0	1072.5	937.5	765.0	646.5	544.14	333.55
1.60V	5752.5	3495.0	2115.0	1607.4	1278.0	1087.5	942.0	774.0	652.5	546.66	334.49

Constant current discharge characteristics at 20°C/68°F Unit: A

F.V. (V/cell) \ Discharge Time	30 Min	1 Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	12 Hr	20 Hr
1.85V	2100.0	1440.0	915.0	707.4	555.0	469.7	405.0	330.0	280.5	243.10	151.47
1.80V	2340.0	1590.0	990.0	750.0	612.0	510.0	435.0	363.0	300.0	257.50	160.50
1.75V	2584.5	1695.0	1054.5	794.1	642.0	540.0	465.0	379.5	316.5	269.03	166.95
1.70V	2865.0	1818.0	1099.5	827.7	658.5	558.0	480.0	393.0	328.5	276.49	171.75
1.65V	3067.5	1891.5	1129.5	855.2	675.0	573.0	498.0	405.0	334.5	280.04	174.00
1.60V	3225.0	1939.5	1162.5	873.5	687.0	582.0	502.5	412.5	337.5	282.66	174.45

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained herein.

For operation, please refer to the instruction from technical manual.

A/3 REV. Dec. 2014

Powered by **B.B. Battery Co., Ltd.**