



VRLA Rechargeable Battery

SHR7-12



Measures Technology Values Innovation

FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- The battery is designed for high rate usage
- Absorbent Glass Mat technology for efficient gas recombination
- The power density at 2 min~15min discharging
- rate is 50% higher than BP series


APPLICATIONS

- UPS
- Fishing Lights
- Power Packs
- Emergency Lights
- Toy-Cars



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	15 Min Rate (27W, 1.60V/Cell)
Approx. Weight	1840g(4.06lbs.)
Terminals	T2 (Faston Tab 250) T1 is optional
Internal Resistance	≤20mΩ (Fully Charged)
Max. Discharge Current	90 A (5 sec.)
Max. Charge Current	1.80 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS(UL94 HB) SHR7-12 Optional: Flame Retardant ABS(UL94 V-0) SHR7-12FR

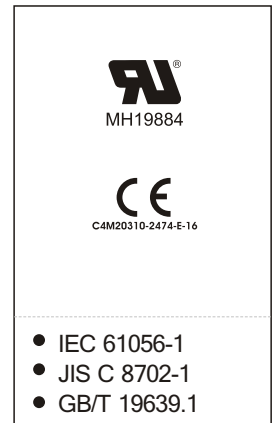

- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

DIMENSION(mm/inch)	OUTER DIMENSIONS	TERMINAL TYPE
Length 90±1.5 (3.54±0.06) Width 70±1.5 (2.76±0.06) Container Height 102±1.5 (4.02±0.06) Total Height 106±2.0 (4.17±0.08)		

Constant power discharge characteristics at 25 °C/77 °F Unit: W											
F.V. (V/cell) \ Discharge Time	2 Min	3 Min	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	484	408	307	196	153	119	88.4	68.7	58.3	51.4	27.5
1.75V	519	438	330	208	157	122	90.4	70.6	59.9	52.1	27.9
1.70V	545	459	343	212	159	124	91.3	71.4	60.4	52.4	28.1
1.67V	557	473	355	217	161	125	92.1	72.2	60.9	52.6	28.3
1.60V	568	486	368	221	162	126	92.9	73.0	61.3	52.8	28.5
1.50V	579	496	372	224	163	127	93.7	73.8	62.0	53.0	28.7

Constant current discharge characteristics at 25 °C/77 °F Unit: A											
F.V. (V/cell) \ Discharge Time	2 Min	3 Min	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	44.5	37.4	27.6	17.1	13.2	10.17	7.50	5.83	4.91	4.31	2.29
1.75V	47.9	40.4	29.8	18.2	13.5	10.46	7.71	6.00	5.05	4.39	2.33
1.70V	50.5	42.4	31.0	18.7	13.7	10.62	7.78	6.07	5.09	4.41	2.34
1.67V	51.6	43.7	32.2	19.2	13.9	10.74	7.86	6.15	5.14	4.43	2.36
1.60V	52.7	44.9	33.4	19.5	14.1	10.85	7.93	6.22	5.18	4.45	2.38
1.50V	53.8	45.9	33.9	19.8	14.3	10.94	8.03	6.30	5.25	4.48	2.40

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained herein.