




VRLA Rechargeable Battery

EP28-12

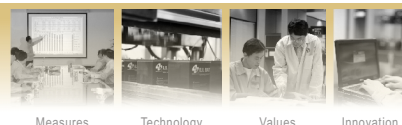

FEATURES

- Absorbent Glass Mat technology for efficient gas recombination
- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- The battery is designed for heavy duty cyclic application

APPLICATIONS

- UPS
- Golf-Carts
- Wheelchairs
- Lawn Mowers
- Electric Vehicles



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	28Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	10Kg(22.05lbs.)
Terminals	B1 (Fitting M5 bolt & nut) , T2 and I1 are optional
Internal Resistance	$\leq 10m\Omega$ (Fully Charged)
Max. Discharge Current	420 A (5 sec.)
Max. Charge Current	8.4 A
Operating Temperature Range	Charge $0^{\circ}\text{C}\sim 40^{\circ}\text{C}(32^{\circ}\text{F}\sim 104^{\circ}\text{F})$ Discharge $-20^{\circ}\text{C}\sim 50^{\circ}\text{C}(-4^{\circ}\text{F}\sim 122^{\circ}\text{F})$ Storage. $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}(-4^{\circ}\text{F}\sim 104^{\circ}\text{F})$
Container Material	Standard: ABS(UL94 HB) EP28-12 Optional: Flame Retardant ABS(UL94 V-0) EP28-12FR



- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

DIMENSION(mm/inch)	OUTER DIMENSIONS	TERMINAL TYPE
Length 175±1.5 (6.89±0.06) Width 166±1.5 (6.54±0.06) Container Height 125±1.5 (4.92±0.06) Total Height 125±1.5 (4.92±0.06)		
Terminal Hardware Initial Torque: B1(2.5Nm±5%),I1(4.0Nm±5%)		

Constant power discharge characteristics at 25 °C/77 °F Unit: W									
F.V. (V/cell)	Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	20 Hr
1.80V		912.0	685.6	555.2	334.0	193.6	81.6	56.4	16.44
1.75V		1056.0	742.8	581.2	346.8	199.2	83.2	57.2	16.80
1.70V		1120.0	769.6	598.8	354.4	202.8	84.0	57.6	16.88
1.65V		1172.0	788.0	612.8	359.6	205.6	84.8	58.0	16.92
1.60V		1208.0	803.6	624.8	363.2	207.6	85.2	58.0	16.92

Constant current discharge characteristics at 25 °C/77 °F Unit: A									
F.V. (V/cell)	Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	20 Hr
1.80V		82.2	60.4	48.3	28.3	16.3	6.80	4.70	1.37
1.75V		96.9	65.4	50.5	29.4	16.7	6.93	4.77	1.40
1.70V		102.8	67.7	52.1	30.0	17.0	7.00	4.80	1.41
1.65V		107.5	69.4	53.3	30.5	17.3	7.07	4.83	1.41
1.60V		110.8	70.7	54.3	30.8	17.4	7.10	4.83	1.41

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.

For operation, please refer to the instruction from technical manual.

B/3 REV. Jul. 2025

Powered by **B.B. Tech(Changsha)Co., Ltd.**