



VRLA Rechargeable Battery

EP7-12



FEATURES

- Absorbent Glass Mat technology for efficient gas recombination
- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- The battery is designed for heavy duty cyclic application


APPLICATION

- UPS
- Toy-Cars
- Power Packs
- Fishing Lights
- Laboratory Equipment




SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	7.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	2600g(5.73lbs.)
Terminals	T2(Faston Tab 250) T1 is optional
Internal Resistance	≤25mΩ (Fully Charged)
Max. Discharge Current	105 A (5 sec.)
Max. Charge Current	2.1 A
Operating Temperature Range	Charge 0°C~40°C(32°F~104°F) Discharge -20°C~50°C(-4°F~122°F) Storage. -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS(UL94 HB) EP7-12 Optional: Flame Retardant ABS(UL94 V-0) EP7-12FR

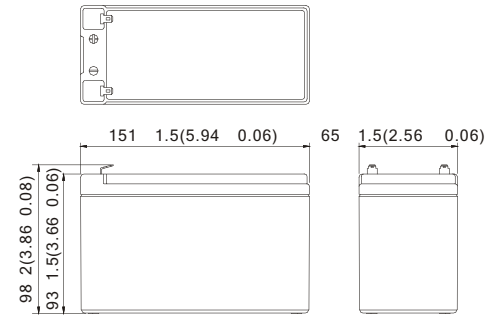
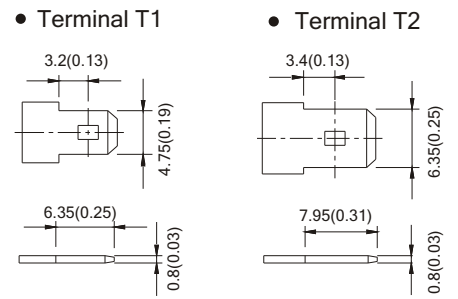


MH19884



C4M20310-2474-E-16

- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

DIMENSION(mm/inch)	OUTER DIMENSIONS	TERMINAL TYPE
<ul style="list-style-type: none"> ■ Length 151±1.5 (5.94±0.06) ■ Width 65±1.5 (2.56±0.06) ■ Container Height 93±1.5 (3.66±0.06) ■ Total Height 98±2.0 (3.86±0.08) 		<ul style="list-style-type: none"> ● Terminal T1 ● Terminal T2 

Constant power discharge characteristics at 25 °C/77 °F										Unit: W
Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr	
F.V. (V/cell)										
1.80V	228.0	171.4	138.8	83.50	48.40	20.40	14.10	7.86	4.11	
1.75V	264.0	185.7	145.3	86.70	49.80	20.80	14.30	7.98	4.20	
1.70V	280.0	192.4	149.7	88.60	50.70	21.00	14.40	8.02	4.22	
1.65V	293.0	197.0	153.2	89.90	51.40	21.20	14.50	8.04	4.23	
1.60V	302.0	200.9	156.2	90.80	51.90	21.30	14.50	8.04	4.23	

Constant current discharge characteristics at 25 °C/77 °F										Unit: A
Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr	
F.V. (V/cell)										
1.80V	20.54	15.09	12.07	7.076	4.067	1.700	1.175	0.655	0.343	
1.75V	24.22	16.35	12.63	7.347	4.185	1.733	1.192	0.665	0.350	
1.70V	25.69	16.94	13.02	7.508	4.261	1.750	1.200	0.668	0.352	
1.65V	26.88	17.34	13.32	7.619	4.319	1.767	1.208	0.670	0.353	
1.60V	27.71	17.68	13.58	7.695	4.361	1.775	1.208	0.670	0.353	

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained herein.

For operation, please refer to the instruction from technical manual.

B/O REV. Apr. 2019

Powered by **B.B. Tech(Changsha)Co., Ltd.**