

FEATURES

- The sulfuric acid is mixed with silica fume, which makes the resulting mass gel-like and immobile.
- Increased durability and deep cycle ability for heavy demand.
- High temperature stability, mechanical strength and low acid displacement.
- Superior performance with deep discharges.
- Patented safety valve to have accurate pressure operating for long battery life.


APPLICATION

- UPS
- Security
- Telecommunication
- Electronic Medical Equipment
- Emergency Lighting



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	70 Ah @ 20 hour rate F.V.(1.75V/cell) 65 Ah @ 10 hour rate F.V.(1.80V/cell)
Approx. Weight	24000g(52.91lbs.)
Terminals	I2
Internal Resistance	≤6mΩ (Fully Charged)
Max. Discharge Current	400 A (5 sec.)
Max. Charge Current	14.0 A
Self Discharge	< 2% per month (25°C)
Operating Temperature Range	-20°C~55°C(-4°F~131°F)
Container Material	Standard: ABS(UL94 HB) GB 12/70 Optional: Flame Retardant ABS(UL94 V-0) GB 12/70FR

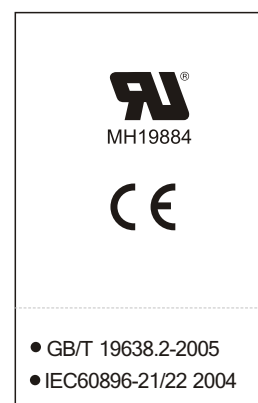

DIMENSION(mm/inch)	OUTER DIMENSIONS	TERMINAL TYPE
<ul style="list-style-type: none"> ■ Length 259.5±2 (10.22±0.08) ■ Width 172.6±2(6.80±0.08) ■ Container Height 200.5±2 (7.89±0.08) ■ Total Height 217.0±2 (8.54±0.08) 		<ul style="list-style-type: none"> ● Terminal I2 <p>[M6 BOLT]</p> <p>Terminal Hardware Initial Torque: I2(5.5Nm±5%)</p>

Constant power discharge characteristics at 25 °C/77 °F							Unit: W
F.V. (V/cell)	Discharge Time	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V		786	465	203.0	148.5	78.0	41.37
1.75V		798	479	207.1	150.7	79.8	42.00
1.70V		804	489	209.6	152.0	80.4	42.33
1.65V		807	495	211.2	152.6	80.7	42.46
1.60V		807	500	212.3	153.0	80.7	42.46

Constant current discharge characteristics at 25 °C/77 °F							Unit: A
F.V. (V/cell)	Discharge Time	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V		65.5	39.6	17.00	12.41	6.50	3.448
1.75V		66.5	40.8	17.34	12.60	6.65	3.500
1.70V		67.0	41.7	17.55	12.71	6.70	3.528
1.65V		67.2	42.2	17.69	12.75	6.72	3.538
1.60V		67.2	42.6	17.78	12.79	6.72	3.538

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.