

VRLA Rechargeable Battery

HRL5.5-12



Measures Technology Values Innovation

FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- The battery is designed for high rate usage
- Absorbent Glass Mat technology for efficient gas recombination
- The power density at 5 min~15min discharging rate is 30% higher than BP series


APPLICATIONS

- UPS
- Data Centre
- Power Packs
- Wind Power
- Jump Starter
- Medical Equipments
- Laboratory Equipment



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	5.0Ah @ 10 hour rate F.V.(1.75V/cell)
Approx. Weight	1800g(3.97lbs.)
Terminals	T1 (Faston Tab 187) T2 is optional
Internal Resistance	≤27mΩ (Fully Charged)
Max. Discharge Current	75 A (5 sec.)
Max. Charge Current	1.5 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS(UL94 HB) HRL5.5-12 Optional: Flame Retardant ABS(UL94 V-0) HRL5.5-12FR

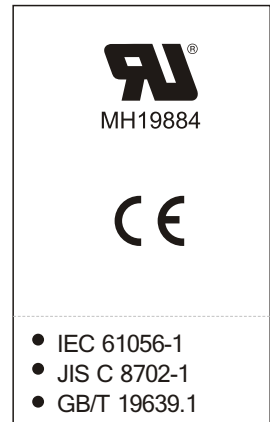

DIMENSION(mm/inch)	OUTER DIMENSIONS	TERMINAL TYPE
Length 90±1.5 (3.54±0.06) Width 70±1.5 (2.76±0.06) Container Height 102±1.5 (4.02±0.06) Total Height 106±2.0 (4.17±0.08)		Terminal T1 Terminal T2

Constant power discharge characteristics at 25 °C/77 °F Unit: W

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	225.5	154.0	111.5	95.2	72.4	55.0	46.0	40.5	22.3
1.70V	269.5	171.9	121.3	100.8	75.4	57.1	47.4	41.4	22.7
1.60V	288.8	180.8	126.8	104.5	77.0	58.4	48.4	42.1	23.1
1.50V	297.0	184.3	129.6	106.2	78.0	59.2	49.0	42.5	23.2
1.40V	302.5	186.8	131.0	107.1	78.5	59.5	49.4	42.8	23.3
1.30V	305.3	188.4	132.0	107.8	79.0	59.8	49.6	42.9	23.3

Constant current discharge characteristics at 25 °C/77 °F Unit: A

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	20.13	13.51	9.65	8.16	6.14	4.63	3.85	3.38	1.86
1.70V	24.50	15.08	10.49	8.64	6.39	4.80	3.97	3.45	1.89
1.60V	26.25	15.86	10.97	8.96	6.53	4.91	4.05	3.51	1.93
1.50V	27.00	16.17	11.21	9.11	6.61	4.98	4.10	3.54	1.93
1.40V	27.50	16.39	11.33	9.19	6.65	5.00	4.13	3.57	1.94
1.30V	27.75	16.53	11.42	9.25	6.69	5.03	4.15	3.58	1.94

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained herein.